




Nominal power	kW	10
Reduced power	kW	3
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	91
Reduced efficiency	%	94,5
Heating volume (min-max)	m <sup>3</sup>	72 - 240
Nominal CO at 13% O <sub>2</sub>	%	0,0095
Reduced CO at 13% O <sub>2</sub>	%	0,0139
Nominal dust content at 13% O <sub>2</sub>	mg/Nm <sup>3</sup>	16,5
Boiler capacity (H <sub>2</sub> O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,66 - 2,24
Autonomy (min-max)	h	6,7 - 22,7
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	51
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,5 - 5,6
Exhaust fumes temperature (max)	°C	215
Net weight	kg	93 - 123
Gross weight	kg	103 - 133
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	C



Art. 15A B-VG 2015  
BImSchV 2015  
Regensburg  
München  
Stuttgart  
Aachen

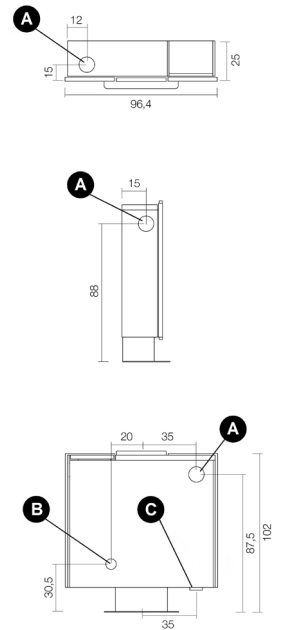

### MATCH

7017032	NEUTRAL STRUCTURE	EAN 8033123618311
6913027	Ivory majolica	EAN 8033123612685
6913026	Maiolica rossoRed majolica	EAN 8033123612920
6913025	White steel	EAN 8033123612876
6913022	New York steel	EAN 8033123612906
6914023	New York day steel	EAN 8033123614979
6913024	Red steel	EAN 8033123612883
6913021	Wengé steel	EAN 8033123612890
6913029	White glass	EAN 8033123612937

### PLUS



Sealed chamber



Cast iron burning pot



Overheating protection



Duction with 1 independent motor



Comfort mode



Wi-Fi kit (optional)



Remote control



Daily weekly programming




Connection to the external thermostat



Upper, back and lateral exhaust


### STOVE PACKING



L (cm)	H (cm)	P (cm)
120	54,6	100


VOLUME (m <sup>3</sup> )
0,66

### LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	37,6	10	98,5
majolica	37,6	10	98,5
glass	37,6	10	98,5

### STOCKING



### TRANSPORT

