




Nominal power	kW	9,26
Reduced power	kW	2,6
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	88,5
Reduced efficiency	%	94,2
Heating volume (min-max)	m ³	62,4 - 222
Nominal CO at 13% O ₂	%	0,012
Reduced CO at 13% O ₂	%	0,024
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	294 - 148
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	3,3 - 2,6
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	108 - 127
Dust content at 13% O ₂ (min-max)	mg/Nm ³	19,2 - 18,9
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,59 - 2,17
Autonomy (min-max)	h	6,9 - 25
Ignition electrical absorption (max)	W	346
Operating electrical absorption (max)	W	77
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11,9
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,6 - 5,7
Exhaust fumes temperature (max)	°C	197
Net weight	kg	94
Gross weight	kg	105
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	C
Ducting Kit (optional)	m	6



Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

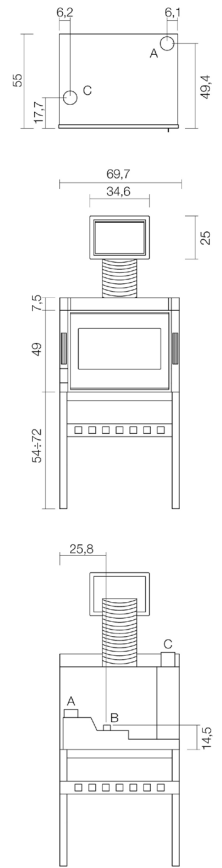


MATCH

7018023		Black steel	EAN 8053859010050
OPTIONAL :			
5018003	Optional	Kit podium	EAN 8053859010272
5018001	Optional	Pellet drawer	EAN 8053859010258
5018002	Optional	Loading pellet door	EAN 8053859010265
5018006	Optional	Frame	EAN 8053859010302
5018007	Optional	Frame drawer	EAN 8053859010319
5018005	Optional	Ducting Kit	EAN 8053859010296

PLUS

- Aluminum auger
- Sealed chamber
- Overheating protection
- Connection to the external thermostat
- Concentric flue kit (optional)
- Cast iron inner with 2nd combustion air
- Wi-Fi kit (optional)
- Upper exhaust
- Ducting Kit (optional)
- Cast iron burning pot
- Daily weekly programming


STOVE PACKING



L (cm)	H (cm)	P (cm)
80	66	70


VOLUME (m ³)
0,37

LINING PACKING



L (cm)	H (cm)	P (cm)
-	-	-

STOCKING



TRANSPORT

