




Afly

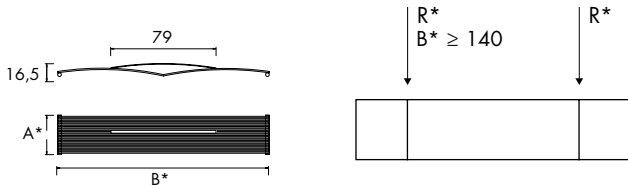

[A] attacco standard
standard connection
raccord standard
standard Anschluss
conexión estándar



[B] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial



P* 122/124

B* cm	inches	A* cm	inches	cm	inches	art*	L*	BTU Δt 50°	watt Δt 50°
Afly 150									
148.5	58.5	24.8	9.8	144.0	56.7	AF13000S150010B	1.7	1 642	482
148.5	58.5	29.6	11.7	144.0	56.7	AF13000S150012B	2.0	1 970	578
148.5	58.5	34.4	13.5	144.0	56.7	AF13000S150014B	2.4	2 299	674
148.5	58.5	39.2	15.4	144.0	56.7	AF13000S150016B	2.7	2 627	770
148.5	58.5	44.0	17.3	144.0	56.7	AF13000S150018B	3.0	2 955	867
148.5	58.5	48.8	19.2	144.0	56.7	AF13000S150020B	3.4	3 284	963
148.5	58.5	53.6	21.1	144.0	56.7	AF13000S150022B	3.7	3 612	1 059
148.5	58.5	58.4	23.0	144.0	56.7	AF13000S150024B	4.0	3 941	1 156
148.5	58.5	63.2	24.9	144.0	56.7	AF13000S150026B	4.4	4 269	1 252
148.5	58.5	68.0	26.8	144.0	56.7	AF13000S150028B	4.7	4 597	1 348
148.5	58.5	72.8	28.7	144.0	56.7	AF13000S150030B	5.0	4 926	1 445
Afly 170									
168.5	66.3	24.8	9.8	164.0	64.6	AF13000S170010B	1.9	1 861	546
168.5	66.3	29.6	11.7	164.0	64.6	AF13000S170012B	2.2	2 233	655
168.5	66.3	34.4	13.5	164.0	64.6	AF13000S170014B	2.6	2 605	764
168.5	66.3	39.2	15.4	164.0	64.6	AF13000S170016B	3.0	2 977	873
168.5	66.3	44.0	17.3	164.0	64.6	AF13000S170018B	3.3	3 350	982
168.5	66.3	48.8	19.2	164.0	64.6	AF13000S170020B	3.7	3 722	1 091
168.5	66.3	53.6	21.1	164.0	64.6	AF13000S170022B	4.1	4 094	1 201
168.5	66.3	58.4	23.0	164.0	64.6	AF13000S170024B	4.5	4 466	1 310
168.5	66.3	63.2	24.9	164.0	64.6	AF13000S170026B	4.8	4 838	1 419
168.5	66.3	68.0	26.8	164.0	64.6	AF13000S170028B	5.2	5 210	1 528
168.5	66.3	72.8	28.7	164.0	64.6	AF13000S170030B	5.6	5 583	1 637
Afly 200									
198.5	78.1	24.8	9.8	194.0	76.4	AF13000S200010B	2.1	2 189	642
198.5	78.1	29.6	11.7	194.0	76.4	AF13000S200012B	2.5	2 627	770
198.5	78.1	34.4	13.5	194.0	76.4	AF13000S200014B	3.0	3 065	899
198.5	78.1	39.2	15.4	194.0	76.4	AF13000S200016B	3.4	3 503	1 027
198.5	78.1	44.0	17.3	194.0	76.4	AF13000S200018B	3.8	3 941	1 156
198.5	78.1	48.8	19.2	194.0	76.4	AF13000S200020B	4.2	4 378	1 284
198.5	78.1	53.6	21.1	194.0	76.4	AF13000S200022B	4.7	4 816	1 412
198.5	78.1	58.4	23.0	194.0	76.4	AF13000S200024B	5.1	5 254	1 541
198.5	78.1	63.2	24.9	194.0	76.4	AF13000S200026B	5.5	5 692	1 669
198.5	78.1	68.0	26.8	194.0	76.4	AF13000S200028B	5.9	6 130	1 798
198.5	78.1	72.8	28.7	194.0	81.8	AF13000S200030B	6.4	6 568	1 926

CROM

art*	BTU Δt 50°	watt Δt 50°
AF13000S150010R	1 100	323
AF13000S150012R	1 320	387
AF13000S150014R	1 540	452
AF13000S150016R	1 760	516
AF13000S150018R	1 980	581
AF13000S150020R	2 200	645
AF13000S150022R	2 420	710
AF13000S150024R	2 640	774
AF13000S150026R	2 860	839
AF13000S150028R	3 080	903
AF13000S150030R	3 301	968
AF13000S170010R		
AF13000S170010R	1 247	366
AF13000S170012R	1 496	439
AF13000S170014R	1 745	512
AF13000S170016R	1 995	585
AF13000S170018R	2 244	658
AF13000S170020R	2 494	731
AF13000S170022R	2 743	804
AF13000S170024R	2 992	877
AF13000S170026R	3 242	951
AF13000S170028R	3 491	1 024
AF13000S170030R	3 741	1 097

A* = altezza / height / hauteur / Höhe / alto
 B* = larghezza / width / longueur / Breite / ancho
 I* = interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
 L* = contenuto acqua / content / volume / Inhalt / volumen

art* = articolo / model / modèle / Artikel / artículo
 P* = pagina / page / page / Seite / página

Kcal = Watt x 0.860
 BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.241
 Watt Δt 40° = Watt Δt 50° x 0.768
 Watt Δt 30° = Watt Δt 50° x 0.546
 Watt Δt 20° = Watt Δt 50° x 0.338

p max = 10.0 bar

Colori / colours / couleurs / Farbe / colores

[BIAN] B standard
 T + 10%
 S + 20%
 [RAL] S + 20%
 RAL non inclusi in tabella
 special Ral colours
 couleurs Ral spéciales
 RAL Farbe nicht in der Tabelle inbegriffen
 colores RAL especiales

Ulteriori dettagli
 Further details
 Ulteriores détails
 Weitere Einzelheiten
 Otros detalles



P* 120